



# Q5/B5 SERIES

## Toxic/Combustible Gas Transmitter



The B5/Q5 Toxic/Combustible Gas Detectors use various sensing technologies to detect a wide assortment of gases. These units are housed in a NEMA 4X rated plastic enclosure that will meet the most stringent applications. All models feature an internal clock, LCD Display for displaying gas concentrations and setup, LED Status Indication, integral buzzer with three user configurable relays and a number of different communication protocols for use with one of our gas controllers or your building management system. Factory calibrated sensor module replacements are available and are easily replaced in the field by removing two screws on the previous module. All units should be checked for proper functionality and calibration once the replacement sensor module is reinstalled and has had a chance to warm up. A user selectable password can be used to protect the system integrity. The Q5 can be used as a standalone controller or in conjunction with the Q4C, M-Controller or Q-Controllers using the proprietary RS-485 Optomux communication protocol. The B5 uses BACnet™ MSTP (RS485) protocol to communicate directly with a BAS. Calibration gases and a 0.2 to 1 liter/minute flow limiting gas regulator are not available through ACI. These should be purchased

through your local gas supply company or on-line companies such as Portagas® (Praxair®, Inc.) or Mesa Specialty Gases®. ACI also offers a full line of horns and strobes that can be used with the Gas detectors or building management system to alert building occupants of an alarm condition. Refer to all applicable Federal, State, Provincial and Local Health and Safety laws and regulations before using these products. The Q5/B5-GENL can be ordered to monitor specific combustible gases such as Gasoline, Ethanol, Diesel or Jet fuel. Contact ACI for specific gases.

**Applications:** Mechanical Rooms, Warehouses, Refrigeration Plants, Industrial Plants, Process Monitoring, Leak Detection, Parking Garages, Auto/Truck Maintenance Facilities, Oil and Gas Industry

**The Q5/B5 Series Gas Transmitters are covered by ACI's Two (2) Year Limited Warranty against defects in material and workmanship from the date of shipment with the exception of the Sensor Modules (Electrochemical/Toxic: Six Months and Catalytic/Combustible: One Year). The warranty can be found in the front of ACI's Sensors & Transmitters catalog, as well as on ACI's website, [www.workaci.com](http://www.workaci.com).**

### PRODUCT SPECIFICATIONS

<b>Supply Voltage [Q5]:</b>	<b>VDC Supply Voltage:</b> 24 VDC nominal (+18 to 30 VDC) (AC Power must not be grounded)
	<b>VAC Supply Voltage:</b> 24 VAC nominal (+15 to 24 VAC, AC Power must not be grounded)
<b>Supply Voltage [B5]:</b>	<b>VDC Supply Voltage:</b> 24 VDC nominal (+18 to 30 VDC) (AC Power can be grounded or non-grounded)
	<b>VAC Supply Voltage:</b> 24 VAC nominal (+15 to 24 VAC, AC Power must not be grounded)
<b>Fuse Protection:</b>	0.750A Polyswitch; (Resets after fault is cleared & power to circuit is removed)
<b>Supply Current   Power Consumption:</b>	0.3A maximum   8.4 VA
<b>Analog Output Signals [Q5 Only]:</b>	<b>Analog:</b> 4-20 mA, 1 to 5 VDC or 2 to 10 VDC (All Analog Output Signals require 4-Wires)
<b>Maximum Load Impedance:</b>	<b>4-20 mA Output:</b> 600 Ohms maximum   <b>1-5 VDC or 2-10 VDC:</b> 3000 Ohms minimum
<b>Communication Protocols:</b>	<b>Q5 Communication Protocols:</b> RS-485 Modbus RTU / OptoMux (Proprietary QEL Controller Protocol)
	<b>B5 Communication Protocols:</b> RS-485 Serial BACnet MS/TP (Master and Slave; Default: Master)
<b>Communication Baud Rates [Q5]:</b>	1200, 2400, 4800, 9600, 14400, 19200, 28800, 38400, 57600, 76800 Bits/Second (Default: 4800)
<b>B5 Communication Baud Rates [B5]:</b>	9600, 19200, 38400, 76800 Bits/Second (Default: 38400)
<b>Factory Calibration Range:</b>	See Gas Sensor Selection & Specification Table on back of data sheet
<b>Display:</b>	LCD Graphic Display with backlight (Displays: TWA, STEL and Concentration)
<b>Keypad:</b>	Three Capacitive Touch sensing keys
<b>Relays   Contact Type   Relay Contact Ratings:</b>	Three   SPDT (Form C) Dry Contacts   1.0A max. @ 30 VDC or 0.3A max. @ 125 VAC (Resistive Loads)
<b>Relay Life Expectancy:</b>	<b>Mechanical:</b> 50,000,000 operations minimum @ 36,000 operations/hour
	<b>Electrical:</b> 200,000 operations minimum @ rated load
<b>Status LEDs:</b>	Two Green LEDs (Tx/Rx Communication Status); Three Red LEDs (Relays 1, 2, & 3)
<b>Buzzer:</b>	80 dB at 3.94" (10 cm), 2700 Hz (3 Programmable Tones)
<b>Sensor Warm Up Time:</b>	24 Hours (Allow 24 hours before calibrating sensor after installation)
<b>Sensor Type:</b>	See Sensor Technology Type in Table on back of Product Data Sheet
<b>Sensor Gas Types:</b>	Combustible, Toxic Gases/Oxygen Sensor & Infrared
<b>Coverage Area   Mounting Height:</b>	See Gas Sensor Selection & Specification Table on back of data sheet
<b>Sensor Life Expectancy:</b>	Toxic/Electrochemical Sensors: 2 to 3 Years, typical; Oxygen/Hydrogen Sensors: 18 months, typical
	Combustible/Catalytic: 3 to 5 years, typical; CO 7 years, typical
<b>Unit Shelf Life:</b>	<b>Electrochemical (Toxic) Sensors:</b> 6 months from date of purchase
	<b>Catalytic (Combustible) Sensors:</b> 1 year from date of purchase
<b>Replacement Sensor Modules:</b>	See additional on-line Product Literature or Contact ACI
<b>Recommended Maintenance:</b>	<b>Combustible Sensors:</b> Accuracy & Bump test every 3 months or as required by Code
	<b>Toxic Sensors:</b> Accuracy & Bump test every 6 months or as required by Code
<b>Enclosure Specifications (Material Type, Flammability, NEMA/IP Rating):</b>	Plastic Enclosure; Polycarbonate Lexan; UL94 V-0, NEMA 4, 4X, 12 and 13 (IP66)
<b>Enclosure Knockouts:</b>	¾" Knockouts (accepts ½" Conduit Fittings)
<b>Operating Temperature   Humidity:</b>	See Sensor Selection & Specification Table on back of data sheet   5 to 95% RH, non-condensing
<b>Operating Atmospheric Pressure<sup>1</sup>:</b>	14.696 psi (1.0132 bar) +/- 10%
<b>Recommended Storage Temperature/Humidity:</b>	32 to 68°F (0 to 20°C)   5 to 95% RH, Non-Condensing
<b>Wiring Connections   Wire Size:</b>	De-pluggable Screw Terminal Blocks   16 to 24 AWG (0.2047 to 1.301 mm) Shielded Twisted Pair
<b>Communications Cable:</b>	Belden 9841 or Equivalent, 120 Ohms Input Impedance
<b>Terminal Block Torque Rating:</b>	0.37 ft-lb (0.502 Nm) Nominal

**Note:** When installed @ > 3000' above sea level, the gas transmitters must be verified for accuracy & re-calibrated as needed after installation






**PRODUCT SPECIFICATIONS** *continued*

<b>Approvals:</b>	RoHS, cETL Listed, Safety requirement for Electrical Equipment for Measurement, Control & Laboratory Use Part 1: CAN/CSA-22.2 No. 61010-1 Third Edition, Dated May 11, 2012; General Requirements UL 61010-1 Third Edition, Dated May 11, 2012 <b>Q5C-CO &amp; B5C-CO only:</b> UL 2075 Gas & Vapor Detectors & Sensors (ETL Control# 4010204)
<b>Product Weight:</b>	1.00 lbs. (0.454 kg)
<b>Product Dimensions (L x W x H):</b>	5.91" (150 mm) x 3.54" (90 mm) x 2.56" (65 mm)

**DIMENSIONAL DRAWING**

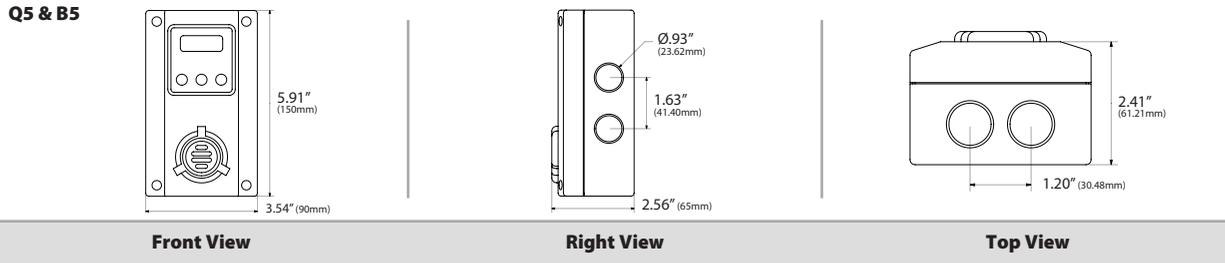

**SENSOR SELECTION AND SPECIFICATION**

Gas Type	Gas Span Code	Combustible	Toxic	100% LEL <sup>1</sup> in % By Vol.	Measurement Range	Operating Temp °F (°C)	Square Feet ft <sup>2</sup> (m <sup>2</sup> )	Radius ft (m)	Mounting Height
Acetone	CH3CO-100L	•		2.6%	0 - 100% LEL	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Low**
Ammonia	NH3-100P		•	N/A	0 - 100 PPM	-22 to 122 (-30 to 50)	7500 (696.7)	49 (14.9)	High**
Ammonia	NH3-1000P		•	N/A	0 - 1000 PPM	-22 to 122 (-30 to 50)	7500 (696.7)	49 (14.9)	High**
Arsine	ASH3-1P		•	N/A	0 - 1 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low**
Benzene	C6H6-100L	•		1.3%	0 - 100% LEL	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Low**
Iso-Butane	C4H10-100L	•		1.8%	0 - 100% LEL	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Low**
Butanol, n-Butane	BUTAN-100L	•		1.9%	0 - 100% LEL	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Low**
Carbon Dioxide	CO2-5000P	Infrared	Infrared	N/A	0 - 5000 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid**
Carbon Dioxide	CO2-5V	Infrared	Infrared	N/A	0 - 5% by Volume	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid**
Carbon Dioxide	CO2-20V	Infrared	Infrared	N/A	0 - 20% Volume	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid**
Carbon Dioxide	CO2-100V	Infrared	Infrared	N/A	0 - 100% Volume	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid**
Carbon Monoxide	CO-250P		•	N/A	0 - 250 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid**
Carbon Monoxide	CO-1000P		•	N/A	0 - 1000 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid**
Chlorine	CL2-5P		•	N/A	0 - 5 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Low**
Chlorine Dioxide	CLO2-2P		•	N/A	0 - 2 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Low**
Combustibles***	GENL-100L	•		Specify Gas	0 - 100% LEL	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Gas Dependent
Diborane	B2H6-2P		•	N/A	0 - 2 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Mid**
Ethylene	C2H4-100L	•		2.7%	0 - 100% LEL	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Mid**
Ethylene Oxide	ETO-20P		•	N/A	0 - 20 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Low**
Germane	GEH4-2P		•	N/A	0 - 2 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low**
Hydrogen	H2-1000P		•	N/A	0 - 1000 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	High**
Hydrogen	H2-2000P		•	N/A	0 - 2000 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	High**
Hydrogen	H2-100L	•		4.0%	0 - 100% LEL	14 to 122 (-10 to 50)	7500 (696.7)	49 (14.9)	High**
Hydrogen Bromide	HBR-30P		•	N/A	0 - 30 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low**
Hydrogen Chloride	HCL-30P		•	N/A	0 - 30 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Mid**
Hydrogen Cyanide	HCN-50P		•	N/A	0 - 50 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Mid**
Hydrogen Sulphide	H2S-25P		•	N/A	0 - 25 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Low**
Hydrogen Sulphide	H2S-100P		•	N/A	0 - 100 PPM	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Low**
Methane	CH4-100L	•		5.0%	0 - 100% LEL	14 to 122 (-10 to 50)	7500 (696.7)	49 (14.9)	High**
Methanol	CH3OH-100L	•		6.7%	0 - 100% LEL	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Low**
Nitric Oxide	NO-100P		•	N/A	0 - 100 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Mid**
Nitrogen Dioxide	NO2-10P		•	N/A	0 - 10 PPM	-4 to 122 (-20 to 50)	7500 (696.7)	49 (14.9)	Low**
Oxygen	O2-25V		•	N/A	0 - 25% by Vol	-22 to 122 (-30 to 50)	7500 (696.7)	40 (12.2)	Mid**
Ozone	O3-1P		•	N/A	0 - 1 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	High**
Iso-Pentane	CSH12-100L	•		1.4%	0 - 100% LEL	14 to 122 (-10 to 50)	5000 (464.5)	40 (12.2)	Low**
Phosphine	PH3-1P		•	N/A	0 - 1 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low**
Phosphine	PH3-5P		•	N/A	0 - 5 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Low**
Propane	C3H8-100L	•		2.1%	0 - 100% LEL	14 to 122 (-10 to 50)	7500 (696.7)	49 (14.9)	Low**
Silane	SiH4-50P		•	N/A	0 - 50 PPM	-4 to 104 (-20 to 40)	5000 (464.5)	40 (12.2)	Mid**
Sulphur Dioxide	SO2-6P		•	N/A	0 - 6 PPM	-4 to 122 (-20 to 50)	5000 (464.5)	40 (12.2)	Low**

**Note\*\*\*:** Lower Explosive Limit (LEL) | **Note\*\*:** Low = 0.5 to 1.5' (0.15 to 0.46m) above floor | Mid = 4.0 to 6.0' (1.20 to 1.83m) above floor | High = 0.5 to 1.5' (0.15 to 0.46m) below ceiling





CUSTOM ORDERING		Model # Example: <b>B5C</b> <b>CO-250P</b> <b>O</b> <b>X</b>	MODEL #
		A. B. C. D.	
<b>A. Sensor Series</b> <i>Select One (1)</i>	<p><b>Q5</b> = Toxic/Combustible Gas Transmitter Series with Analog/Relay/Communicating Output Signals and Display (All gases except CO)</p> <p><b>Q5C</b> = Carbon Monoxide Toxic Gas Transmitter (Certified to meet UL 2075 Requirements for Carbon Monoxide (CO) only)</p> <p><b>B5</b> = Toxic/Combustible MS/TP BACnet™ Gas Detection Transmitter with Relays and LCD Display (All gases except CO)</p> <p><b>B5C</b> = Carbon Monoxide MS/TP BACnet™ Toxic Gas Transmitter (Certified to meet UL 2075 Requirements for Carbon Monoxide (CO) only)</p>		
<b>B. Gas Span Code</b> <i>Select One (1)</i>	<b>Enter a "Gas Span Code" from the Sensor Selection &amp; Specification Table</b>		
<b>C. Enclosure</b> <i>No Selection Required</i>	<b>O</b> = Standard Wall Mount Enclosure →		<b>O</b>
<b>D. Revision</b> <i>No Selection Required</i>	<b>X</b> = Factory Provided →		<b>X</b>

STANDARD ORDERING			Model # Example: <b>Q5C-CO-250P-O-X</b> -OR- <b>141036</b>
Model #	Item #	Description	
<b>Q5C-CO-250P-O-X</b>	141036	CO, 0-250 ppm, UL2075 Certified	
<b>B5C-CO-250P-O-X</b>	140654	BACnet™ CO, 0-250 ppm, UL2075 Certified	

ACCESSORIES ORDERING   Q5, B5			Model # Example: <b>85930-006-000</b> -OR- <b>128901</b>
Model #	Item #	Description	
<b>85930-006-000</b>	128901	Calibration Adaptor Kit for Q5/B5, Q6/B6	
<b>85930-007-000</b>	130812	Sensor Splash Guard Kit for Q5/B5, Q6/B6	
<b>85930-040-000</b>	131510	Duct Mount Kit (Adaptor, Tubing, Pitot Tubes) for Q5/B5, Q6/B6	
<b>GSG-1</b>	141059	Gas Sensor Protective Guard (White)	

ACCESSORIES ORDERING   HORN STROBE			Model # Example: <b>FSIG-SLM500A</b> -OR- <b>136476</b>
Model #	Item #	Description	
<b>FSIG-SLM500A</b>	136476	Streamline Horn and Strobe (Amber)	
<b>FSIG-SLM500B</b>	142976	Streamline Horn and Strobe (Blue)	
<b>FSIG-SLM500G</b>	143013	Streamline Horn and Strobe (Green)	
<b>FSIG-SLM500R</b>	143132	Streamline Horn and Strobe (Red)	

ACCESSORIES ORDERING   MOUNTING BASE			Model # Example: <b>FSIG-SLMBW-012-024GY</b> -OR- <b>136477</b>
Model #	Item #	Description	
<b>FSIG-SLMBD-012-024GY</b>	142977	Deep Base for FSIG-SLM500 Series; Gray	
<b>FSIG-SLMBW-012-024GY</b>	136477	Wall Mount Base for FSIG-SLM500 Series; Gray	

**Note:** See Strobe & Alarm Data Sheet if required

